Optik 125 (2014) 1864–1867

Contents lists available at ScienceDirect

Optik

journal homepage: www.elsevier.de/ijleo

Enhanced performance analysis of 10 Gbit/s optical OFDM-RoF transmission links

Naresh Kumar[a,*], Ajay K. Sharma[b], Vinod Kapoor[a]

[a] Electronics and Communication Engineering Department, National Institute of Technology, Hamirpur, H.P., India
[b] Computer Science and Engineering Department, National Institute of Technology, Jalandhar, Punjab, India

ARTICLE INFO

Article history:
Received 10 May 2013
Accepted 10 October 2013

Keywords:
Orthogonal frequency division multiplexing (OFDM)
Radio over fiber (RoF)
Optical single side band
Square root module
Signal to noise ratio

ABSTRACT

In this paper, we have presented analysis of 10 Gbit/s optical OFDM-RoF transmissions links with distance of 50 km and reported the improved performance by usage of a square root module (SQRT).

1. Introduction

Radio over fiber (RoF) is a hybrid system having both fiber optic link and free-space radio path. In such RoF systems microwave data signals are modulated onto an optical carrier at a central station and then transported to remote sites or base station using optical fiber [1]. The base-stations then transmit the RF signals over small areas using microwave antennas. Such a system is important in number of applications including mobile, satellite communications, wireless local area networks, mobile broadband service etc. [2]. OFDM is used extensively in broadband wired and wireless communication systems [3–5]. In OFDM, the received signal at any time depends on multiple transmitted symbols. In this case the equalization rises rapidly [6]. Combined RoF technology with optical OFDM system cannot only reduce multipath fading of wireless signals but also improves signal quality. Moreover, the systems have seamless coverage, increased channel capacity, transmission rate and simplify digital signal processing by means of adding more base stations [7]. Therefore, Optical OFDM system can be regarded as a specific deployment scheme of OFDM-RoF system. By this system, we can also improve the system flexibility and provide a very large coverage area without increasing the cost and complexity of the system. Radio over fiber transmission performance of OFDM signals for dual-band of 2.4/5 GHz wireless LAN systems with very low-data rate have been evaluated [8,9]. An experimental demonstration of OFDM-RoF system for transmitting 1 Gbps OFDM signal on 40 GHz millimeter-wave carriers over 80 km SSM fiber is proposed and achieved less than 0.5 dB power penalty at BER of 10^{-6} without dispersion compensation [10]. We have proposed to use a square root transfer function module similar as reported in [11,12]. The square root module (SQRT) transfer function module has been placed after the photodiode which compensates its square law characteristic for improving the performance of linear equalizer [13]. In this paper we propose the simulative OFDM-RoF transmitter and receiver with optical fiber reported in Section 2. The simulation results have been discussed in Section 3. The conclusion of our simulative results is presented in Section 4.

2. System description

In our proposed optical OFDM-RoF transmission links (Fig. 1), 10 Gbit/s QAM data is generated and then modulated into OFDM by means of OFDM modulator using 512 subcarriers and FFT size of 1024. These are then IQ modulated at an intermediate frequency of 7.5 GHz. Then OFDM analog signal is mixed with RF signal of 17.5 GHz through clock. This Intermediate signal modulates directly the light of a continuous wave (CW) through Mach–Zehnder modulator (MZM). The light is then transmitted on single mode fiber. The attenuation of the fiber is 0.2 dB/km.

After propagation the signal is converted optical to electrical through PIN photodiode. The electrical and optical sample spectra along the system are presented in Figs. 2 and 3.

* Corresponding author.
E-mail address: naresh.nitham@gmail.com (N. Kumar).

0030-4026/$ – see front matter
http://dx.doi.org/10.1016/j.ijleo.2013.10.037

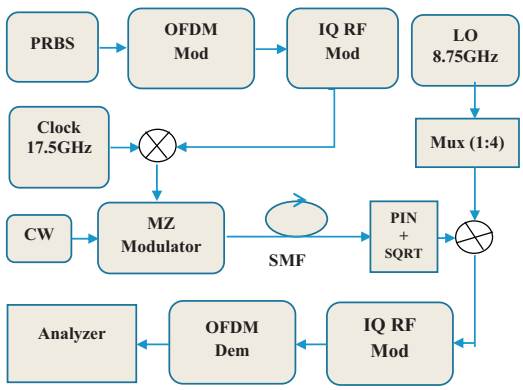

Fig. 1. Simulation setup of a high speed OFDM-RoF transmission links.

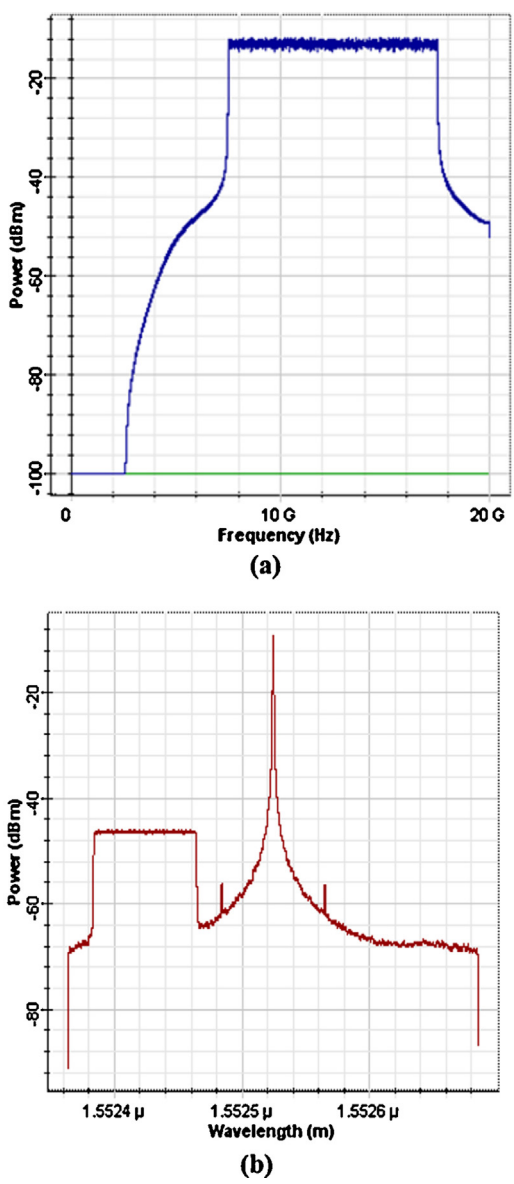

Fig. 2. Electrical and optical spectrum of (a) OFDM-RF mixed signal and (b) OFDM-RoF using SSB modulation scheme.

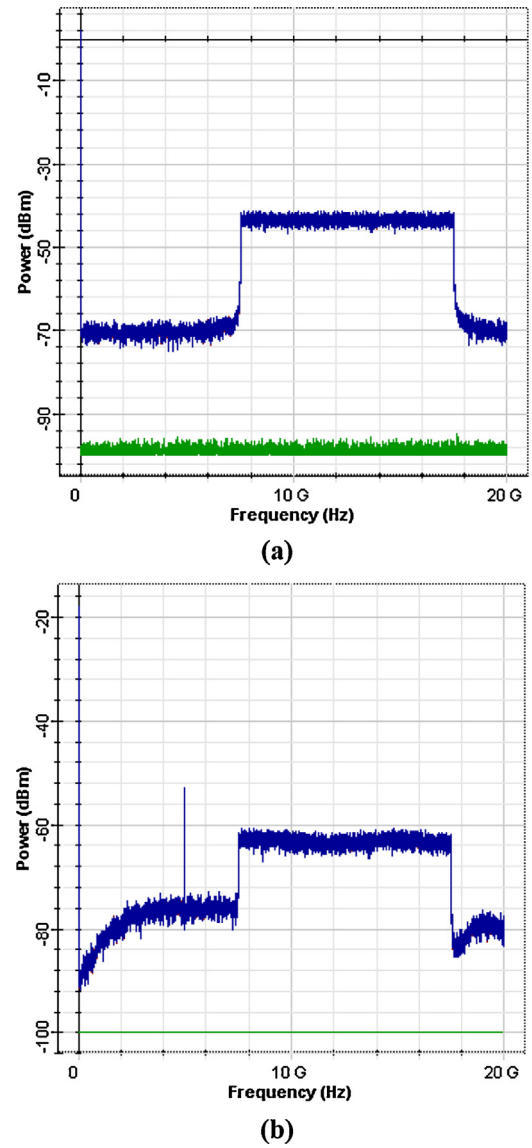

Fig. 3. Electrical spectrum of OFDM-RoF transmission links with (a) OSSB modulated data after optical span of 0 km and (b) OSSB modulated data after optical span of 50 km.

The electrical spectrum of OFDM analog signal after mixing with RF signal of 17.5 GHz is depicted in Fig. 2(a) while the optical spectrum optical single side band (OSSB) treated with OFDM-RoF after MZM is depicted in Fig. 2(b). The Electrical spectrum of OFDM-RoF transmission links with OSSB modulated data after optical span of 0 km is depicted in Fig. 3(a) while after optical span of 50 km is depicted in Fig. 3(b).

3. Results and discussion

For the sake of reference performance and better understanding of the benefits of the proposed scheme, we have started by characterizing the system without the SQRT module and then considering the SQRT module.

3.1. Case I: analysis of SSB-OFDM-RoF transmission link

The parameters used in this case are transmission length is set to 50 km, transmitter power – 4 dBm, attenuation = 0.2 dB/km, dispersion = 16.75 ps/nm/km.

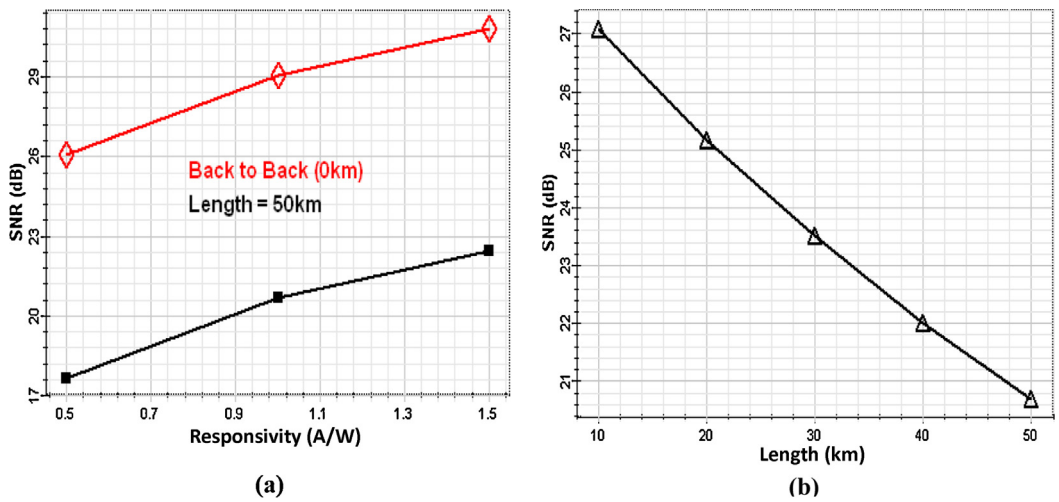

Fig. 4. Evaluation of SNR versus responsivity after back to back (B2B) and 50 km (b) SNR versus length at 50 km using 4 QAM after preamplifier at 10 Gbps.

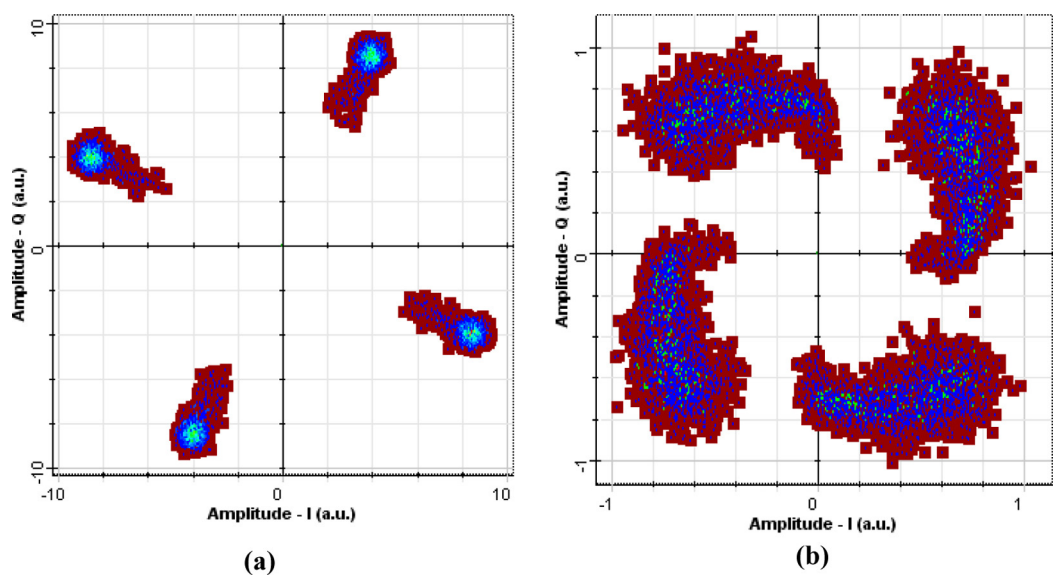

Fig. 5. Constellation diagram of 4QAM-OFDM-RoF transmission links after 0 km (a) and 50 km (b).

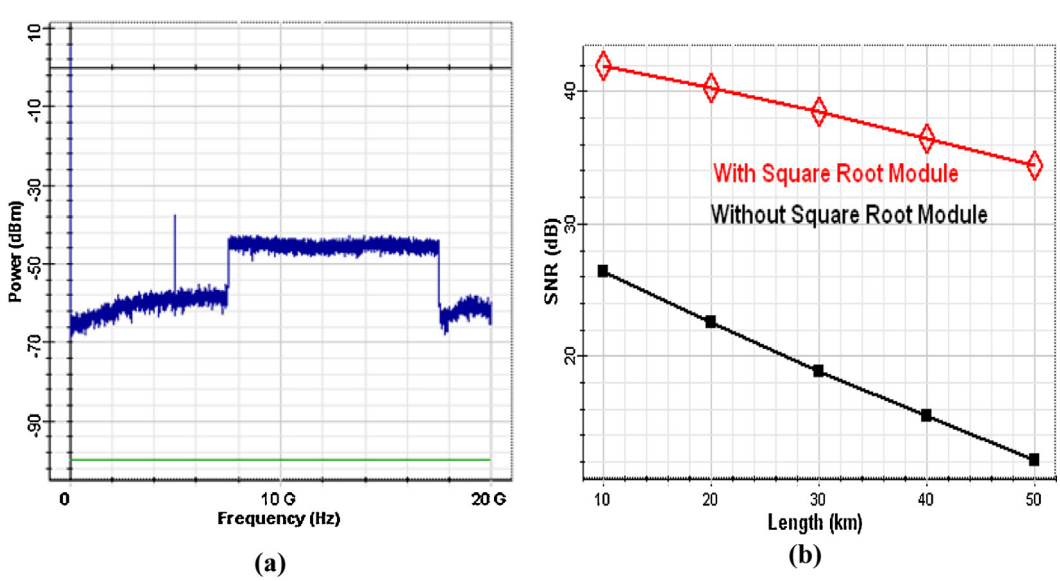

Fig. 6. (a) Electrical spectrum of OFDM-RoF transmission system with SQRT and (b) evaluation of SNR versus range with and without SR module.

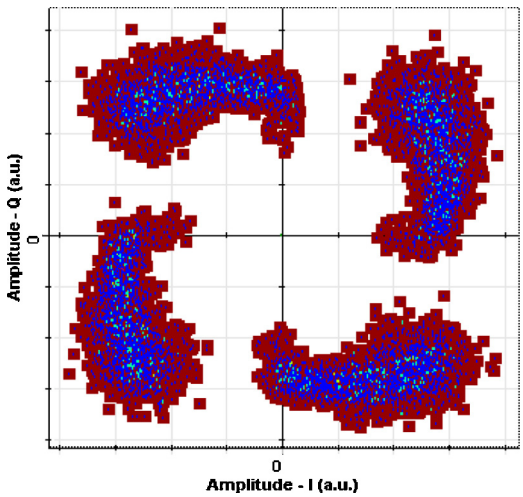

Fig. 7. Constellation diagram of 4QAM-OFDM-RoF system after 50 km with SQRT module without noise.

From Fig. 4(a) it is observed that SNR is improved in B2B by 28% and the reach greatly extended above the 50 km. Further Fig. 4(b) depicts the measurement of SNR versus length with 4QAM. It has been shown that SNR reduces from 27 to 20 dB in the in the length 10–50 km.

For better insight we also show in Fig. 5 the two 4 QAM constellations at B2B and 50 km without SQRT.

3.2. Case II: improved analysis of OFDM-RoF transmission link

In this analysis we have considered the SQRT module following the PIN to compensate for its square law response resulting in improved performance of the linear equalizer.

Fig. 6(b) depicts the measurement of SNR versus length with 4QAM. It has been observed that SNR reduces from 27 dB to 10 dB in the range of 10 km to 50 Km without using the SM module. Alternatively, SNR varies in the range of 42–34 dB with SM module in the range of 10–50 km. It means that an efficient improvement in SNR ratio is achieved with SM module, which further helps in increasing the length of OFDM-RoF transmission system.

For better insight we also show in Fig. 7 the 4QAM constellations at 50 km with SQRT.

4. Conclusion

We have analyzed a 10 Gbit/s OFDM-RoF transmission system using 4QAM modulation with and without SQRT module. It is concluded that the introduction of a SQRT module has greatly improved the performance of the system as compare to without SQRT system. Further, due to the increase of SNR the distance coverage will also be increased.

References

[1] Hamed Al Raweshidy, Shozo Komaki, Radio over Fiber Technologies for Mobile Communications Networks, Artech House, London, 2002.
[2] J.E. Mitchell, Performance of OFDM at 5.8 GHz using radio over fiber link, Electron. Lett. 40 (21) (2004) 1353–1354.
[3] O. Gonzalez, R.P. Jimenez, S. Rodriguez, J. Rabadan, A. Ayala, OFDM over indoor wireless optical channel, Optoelectronics, IEE Proc. 152 (2005) 199–204.
[4] N. Cvijetic, S. Wilson, WiMAX access using optical wireless technology with heterodyne detection in turbulent atmosphearic channel, in: Proc. IEEE Globecom, OPN01.4, 2006.
[5] I.B. Djordjevic, LDPC coded OFDM over the atmospheric turbulent channel, Opt. Express 15 (2007) 6336–6350.
[6] A. Bahai, B.R. Saltzberg, Multicarrier Digital Communication: Theory and Applications of OFDM, Kluwer, Norwell, MA, 1999.
[7] R. Prasad, OFDM for Wireless Communications Systems, Artech House Publication, London, 2004.
[8] H. Sasa, T. Niiho, K. Tanaka, K. Utsumi, S. Morikura, Radio-over-fiber transmission performance of OFDM signal for dual-band wireless LAN systems, in: MWP 2003, 2003, pp. 139–142.
[9] Y. Joo Kim, Y. Kim, 60 GHz wireless communication systems with radio-over-fiber links for indoor wireless LANs, IEEE Transactions on Consumer Electronics 50 (2000) 517–520.
[10] Z. Jia, J. Yu, D. Qian, G. Ellinas, G.-K. Chang, Experimental demonstration for delivering 1 Gbps OFDM signals over 80-km SSMF in 40-GHz radio-over-fiber access systems, in: OFC/NFOEC 2008, JWA108, 2008.
[11] J. Prat, M. María, C. Santos, M. Omella, Square root module to combat dispersion-induced nonlinear distortion in radio-over-fiber systems, IEEE Photonics Technol. Lett. 18 (2006) 1928–1930.
[12] V. Sharma, N. Kumar, Improved analysis of 2.5 Gbps-inter-satellite link (ISL) in inter-satellite optical-wireless communication (IsOWC) system, Opt. Commun. 286 (2013) 99–102.
[13] J. Prat, A. Napoli, J.M. Gené, M. Omella, P. Poggiolini, V. Curri, Square root strategy: a novel method to line arise an optical communications system with linear equalizers, in: Proc. ECOC 2005, Paper We4.P.106, Glasgow, UK, 2005.